



ТЕХКАРТА

## W 18 ALDL (Double Lock)

СОСТАВЛЯЮЩИЕ УПАКОВКИ	Номера форм:			
контейнер	301	326		
крышка	302	320	339	371
ручка	00	00		

ВЕДРО	Номера форм:	
	301	326
Вес <sup>1</sup>	520.0г	535.0г
Номинальный объем	18000 мл	
Объем до крышки	19200 мл	
a - наружный диаметр по короне <sup>2</sup>	319 мм	
b - внутренний диаметр по короне <sup>2</sup>	302 мм	
c - наружный диаметр дна <sup>2</sup>	279 мм	
h - высота контейнера <sup>2</sup>	310 мм	
	пластик	металл
<sup>1</sup>	23.0g	55.0g
	-	-

<sup>1</sup> толерантность +/- 5% <sup>2</sup> толерантность +/- 0,25%

КРЫШКА	Номера форм:			
	302	320	339	371
Вес <sup>1</sup>	136.0г	135.0г	138.0г	130.0г
Наружный диаметр <sup>2</sup>	319 мм	319 мм	319 мм	316 мм
высота <sup>2</sup>	19 мм	19 мм	19 мм	19 мм

<sup>1</sup> толерантность +/- 5% <sup>2</sup> толерантность +/- 0,25%


УПАКОВКА ПРОДУКЦИИ	Ассортимент:	
	Ведро	Крышки
Количество / Евро паллет	300	1200

Другие способы упаковки доступны по индивидуальному запросу


ДЕКОРАЦИИ	Ассортимент:	
	Ведро	Крышки
Возможные способы печати	Офсет / IML	Офсет / IML

### ДОПОЛНИТЕЛЬНАЯ ИНФОРМАЦИЯ

Материал	PP / PE / -
Цветовая гамма	Белый - стандарт, цвет - под заказ
Защита	<b>Double Lock</b> - Контрольный замок первого вскрытия, край короны, защищающий от вскрытия упаковки
Максимальное давление при 20°C	66.0 кг
Условия хранения	Контейнер общего назначения для упаковки, хранения и транспортировки жидкостей, сыпучих или жидких материалов В сухих закрытых складских помещениях, без посторонних запахов, при постоянной температуре от -5°C до + 25°C, не подверженных прямому УФ-излучению.
Заполнение	Минимальная температура ведра перед наполнением + 5°C. Максимальная температура заряда + 85°C



### РАЗМЕЩЕНИЕ НА ЕВРОПАЛЛЕТЕ

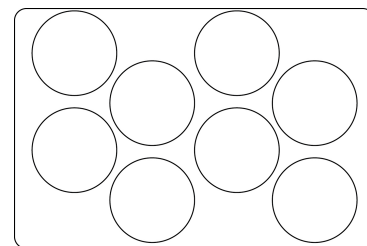

Цифровая техкарта  
2025-09-05 07:51:33



Kolonia Warszawska, 27.06.2025

## General terms and conditions of use, storage, transport and filling of polypropylene packaging manufactured by Plast Service Pack Sp. z o. o.

The containers offered by PSP are single-use packaging. Containers are general purpose packaging, used for package, storage and transport of liquid, powdery and greasy substances.

- Filling conditions.  
The temperature of the product during confection should be within the range of +5°C to +85°C. The containers at the time of filling must have a room temperature of approx. 20°C.

Once the confectioned product reaches a temperature of 25-30°C, the containers achieve optimal strength and stiffness, which enables the containers to be stacked according to the information provided in the specification.

- The weight of the product confectioned into the container should be calculated so that the maximum pressure given to the container placed on the lowest layer at a temperature of 20°C does not exceed the value given in the specification of that packaging.

It is the customer's responsibility to validate the packaging with the target batch.

*For example*, the maximum static top load for W10ALDL at 20°C is 48 kg. Assuming that the input is water, where 1 L equals 1 kg, the maximum weight of the batch is 9.5 kg and the buckets can be placed in a maximum of 6 layers on the pallet.

- Storage and transport conditions.  
The packaging should be stored in dry and closed warehouses, free of foreign odors, at a constant temperature from -5°C to +25°C, and not exposed to direct UV rays. Packagings require storage and transport tests in the target environment. The manufacturer is not responsible for the deformation of packaging and its damage resulting from the stacking of single pallets one on another or placing additional loads on them.
- Packages with products inside should be carried with applied plastic or metal handle by hand. Lifting with a rope with a hook is prohibited.
- Warranty for the packaging is valid for 12 months from the date of delivery. Within this time, the packaging should be used for its intended purpose. All packages from a single pallet should be used immediately after unpacking.
- All raw materials and dyes used in the production of packaging for the food industry are approved for food contact.

Plast Service Pack Sp. z o. o. is not responsible for the use of packaging inconsistent with the intended use indicated in the packaging specification, in particular:

- for storing and transporting dangerous substances, including chemicals or boiling water;
- to carry loads in the packaging above the indicated max top load shown in the specification sheet.

Keep packaging away from children.

Use of the packaging inconsistently with its intended use may be dangerous to life or health.

„PLAST SERVICE PACK” SP. Z O.O.  
Kolonia Warszawska, Al. Krakowska 96A  
05-552 Wólka Kosowska  
NIP: 1231283932

KATARZYNA RUMIŃSKA  
  
CZŁONEK ZARZĄDU  
„PLAST SERVICE PACK” SP. Z O.O.

MIROŚLAW WILCZYŃSKI  
  
CZŁONEK ZARZĄDU  
„PLAST SERVICE PACK” SP. Z O.O.

Plast Service Pack Sp. z o.o. Kolonia Warszawska Al. Krakowska 96A 05-552 Wólka Kosowska